


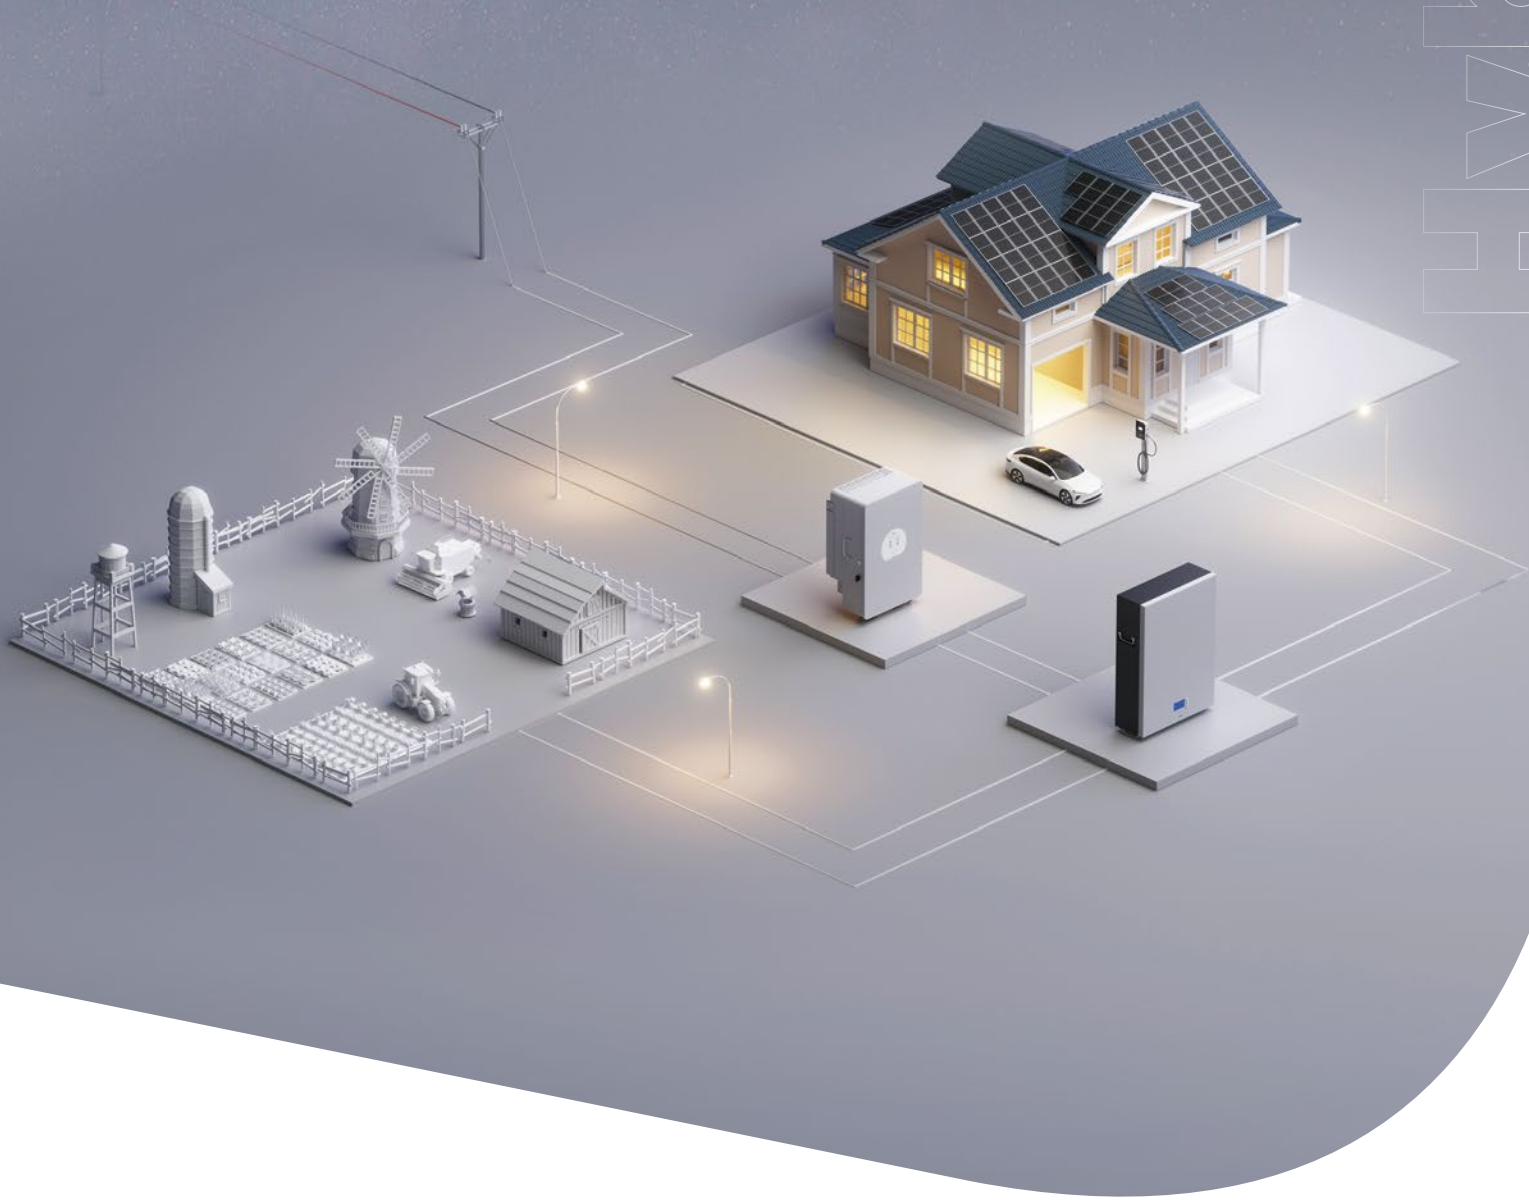


Hybrid Solar System

EU Voltage


SP-5KW-HY

SP-5KW-HY

(Residential Hybrid Solar System)

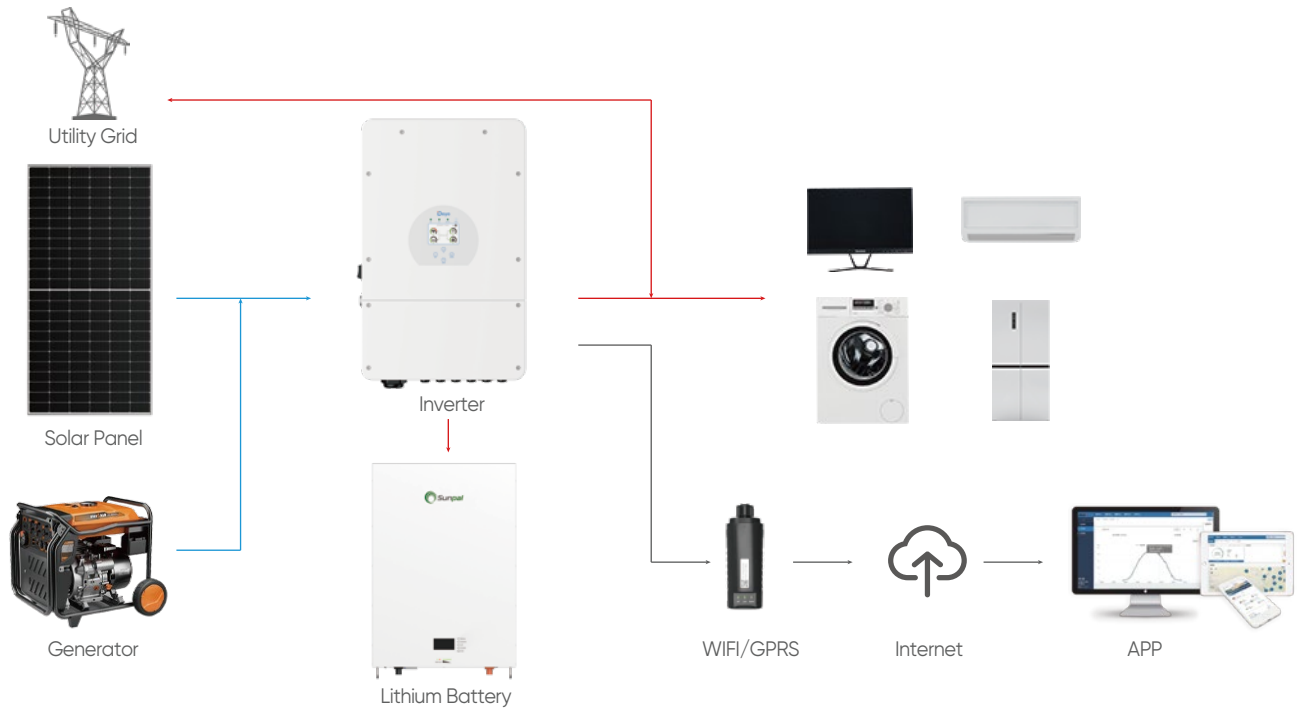

SOLAR SYSTEM KIT

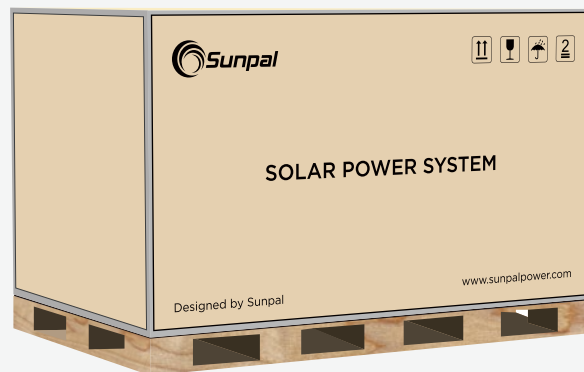

Solar Panel



Lithium Battery



Solar Inverter



Wifi Monitor



PV Cable



MC4 Connector



Mounting Bracket



DC Switch/AC Switch(Optional)



PV Module

- Positive power tolerance (0~+5W) guaranteed
- Reduced resistive loss with lower operating current
- Higher energy yield with lower operating current
- Reduced hot spot risk with optimized electrical design and lower operating current

Parameter

Testing Condition	STC
Maximum Power(Pmax/W)	580W
Open Circuit Voltage(Voc/V)	51.79
Short Circuit Current(Isc/A)	14.29
Voltage at Maximum Power(Vmp/V)	42.71
Current at Maximum Power(Impp/A)	13.58
Module Efficiency(%)	22.44



580w

TOPCon Bifacial Dual Glass
Solar Panel

Lithium Battery



48v 200Ah

Rack-Mounted
LiFePO4 Battery

- High Specific Energy
- Support Parallel Operation
- Easy Installation
- Long Cycle Life

Parameter

Nominal Capacity	200Ah
Nominal Voltage	48V
Max.Charging Current	100A
Max.Discharging Current	100A

Inverter

- Colorful touch LCD, IP65 protection degree
- AC couple to retrofit existing solar system
- 6 time periods for battery charging/discharging
- Support storing energy from diesel generator

Parameter

AC Output Data

Rated Output Power	5000W
Rated Output Voltage/Frequency	230Vac single phase, 50Hz/60Hz

Battery Input Data

Battery Type	Lead-acid or Lithium-ion
Battery Voltage Range(V)	40-60

PV String Input Data

No.of MPP Trackers	2
No.of Strings per MPP Tracker	1+1
MPPT Voltage Range(V)	125-425



Deye 5KW

Inverter



Sunpal Power Co., Ltd.

Add: NO.398 Ganquan Road, Hefei, China

Tel: +86 183 5508 8031

Email: frankie@sunpalsolar.com

Web: www.sunpal-energy.com