On Grid Solar System

EU Voltage

SP-10KW3-ON

Web: www.sunpal-energy.com Email: frankie@sunpalsolar.com Tel: +86 183 5508 8031

SP-10KW3-ON

(Residential On Grid Solar System)

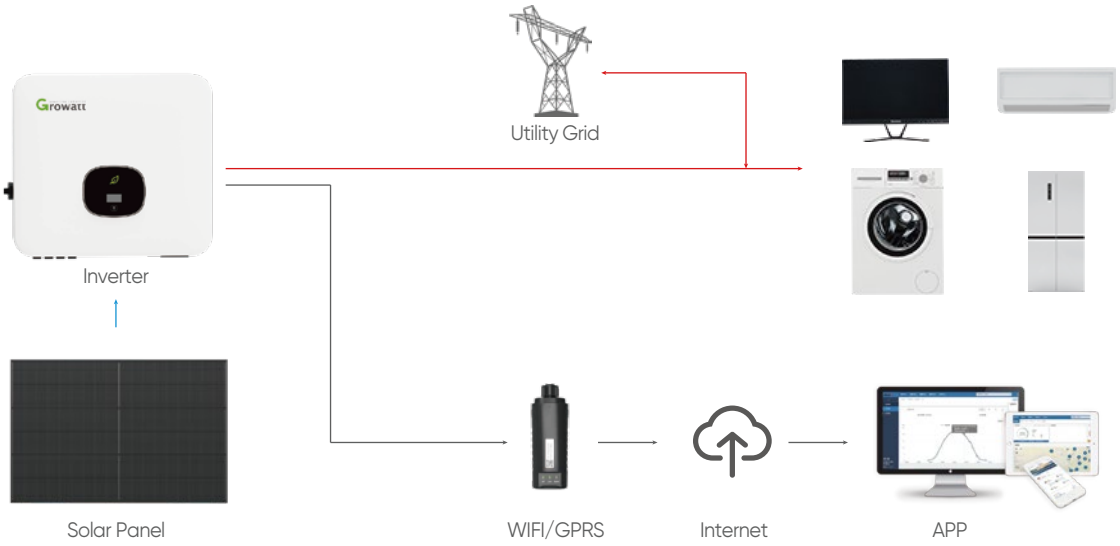

SOLAR SYSTEM KIT

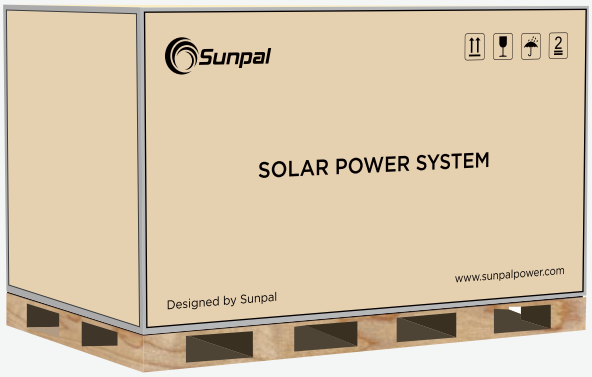

Solar Panel

Solar Inverter

Wifi Monitor

PV Cable

MC4 Connector

Mounting Bracket

AC Switch(Optional)

DC Switch(Optional)

Web: www.sunpal-energy.com Email: frankie@sunpalsolar.com Tel: +86 183 5508 8031

PV Module

- Positive power tolerance (0~+5W) guaranteed
- Reduced resistive loss with lower operating current
- Higher energy yield with lower operating current
- Reduced hot spot risk with optimized electrical design and lower operating current

Parameter	
Testing Condition	STC
Maximum Power(Pmax/W)	440W
Open Circuit Voltage(Voc/V)	39.44
Short Circuit Current(Isc/A)	14.27
Voltage at Maximum Power(Vmp/V)	32.45
Current at Maximum Power(Imp/A)	13.56
Module Efficiency(%)	22.53

440W

Topcon Bifacial Black Solar Panel

Inverter

Parameter	
Input Data (DC)	
Max. recommended PV power (for module STC)	15000W
MPPT voltage range	140V-1000V
No. of MPP trackers	2
No. of PV strings per MPP tracker	1
Output data (AC)	
AC nominal power	10000W
Nominal AC voltage（range*）	220V/380V, 230V/400V (340-440V)
AC grid frequency（range*）	50/60 Hz (45-55Hz/55-65 Hz)
General Data	
Dimensions (W / H / D)	425/387/178mm
Weight	14kg
Topology	Transformerless
Cooling	Natural convection
Protection degree	IP65

- Advanced MPPT with up to 99.9% efficiency
- Up to 6 units in parallel connection
- Easy to install and simple to use
- Supports Li-ion battery BMS communication

MOD 10KTL3-X

Inverter

Sunpal Power Co., Ltd.

Add: NO.398 Ganquan Road, Hefei, China

Tel: +86 183 5508 8031

Email: frankie@sunpalsolar.com

Web: www.sunpal-energy.com